

RELEASABLE - COATED

Technical Information: Stainless Steel Releasable, Coated

Material A. 316 grade non-magnetic stainless steel
B. 304 grade non-magnetic stainless steel

Temperature Range -30°C to + 150°C

Coating Pure Polyester or Epoxy (Colour Black)

Flammability rating Flame Retardant Halogen Free & Non-Toxic


Loop Tensile Strength 6.35 mm width : 1334 N (300lb)
9.53 mm width : 2000N (450lb)

RC66-900	R	RELEASABLE TYPE
	C	Coated
	6	having width 6.35 mm
	6	Grade SS 316
-900		Length of the tie



Releasable Coated Regular Ties

RC96-900	R	RELEASABLE TYPE
	C	Powder Coated
	9	having width 9.53 mm
	6	Grade SS 316
-900		Length of the tie

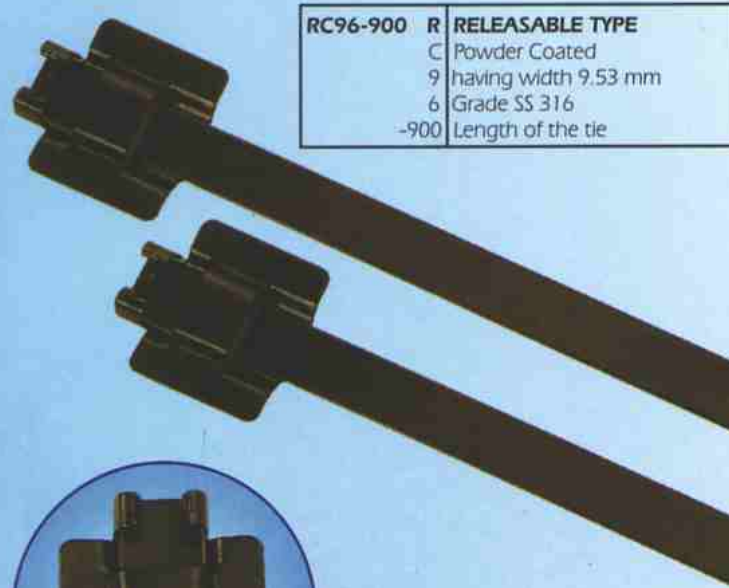

Releasable Coated Heavy Duty Ties

Regular - SS 316

S.No.	Series	Length mm	Width mm	Metal Thickness mm
1	RC66-150	150	6.35	0.5
2	RC66-230	230	6.35	0.5
3	RC66-330	330	6.35	0.5
4	RC66-450	450	6.35	0.5
5	RC66-600	600	6.35	0.5
6	RC66-750	750	6.35	0.5
7	RC66-900	900	6.35	0.5

Heavy Duty - SS 316

S.No.	Series	Length mm	Width mm	Metal Thickness mm
8	RC96-150	150	9.53	0.5
9	RC96-230	230	9.53	0.5
10	RC96-330	330	9.53	0.5
11	RC96-450	450	9.53	0.5
12	RC96-600	600	9.53	0.5
13	RC96-750	750	9.53	0.5
14	RC96-900	900	9.53	0.5

Regular - SS 304

S.No.	Series	Length mm	Width mm	Metal Thickness mm
1	RC64-150	150	6.35	0.5
2	RC64-230	230	6.35	0.5
3	RC64-330	330	6.35	0.5
4	RC64-450	450	6.35	0.5
5	RC64-600	600	6.35	0.5
6	RC64-750	750	6.35	0.5
7	RC64-900	900	6.35	0.5

Heavy Duty - SS 304

S.No.	Series	Length mm	Width mm	Metal Thickness mm
8	RC94-150	150	9.53	0.5
9	RC94-230	230	9.53	0.5
10	RC94-330	330	9.53	0.5
11	RC94-450	450	9.53	0.5
12	RC94-600	600	9.53	0.5
13	RC94-750	750	9.53	0.5
14	RC94-900	900	9.53	0.5